


Attenuator

- Wavelength independent (DWDM)
- Durability (well over 100 mw)
- Simple and reliable structure
- Modal noise suppression
- Low insertion tolerance
- Easy to install
- Stable environment

Application

- Telecommunication network
- Cable television networks
- Testing instruments
- Fiber optic sensors
- Local area network
- Data network
- FTTH
- Video

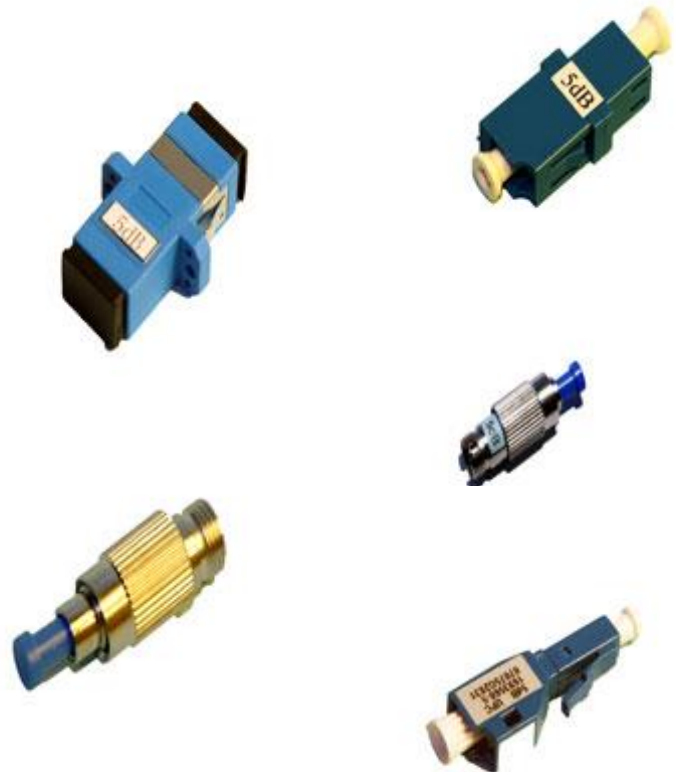

Item	Standard
Operation wavelength (nm)	1310/1550
Connector	FC,SC,ST,LC,MU
Attenuation (db)	1~30
Return loss (db)	PC>45,UPC >50 ,APC >60
Attenuation Accuracy (db)	+/-0.5(1-10db) ,+/-1.0 (11-30db)
Polarization Dependent Loss	<0.2 db
Operation Temperature (c)	-40 ~+80
Storage Temperature (C)	-50 ~+85